


露出型防水コンセント

60A~100A

WATER PROOF CONNECTOR

V 440
A 100 
P 4
 38-S6

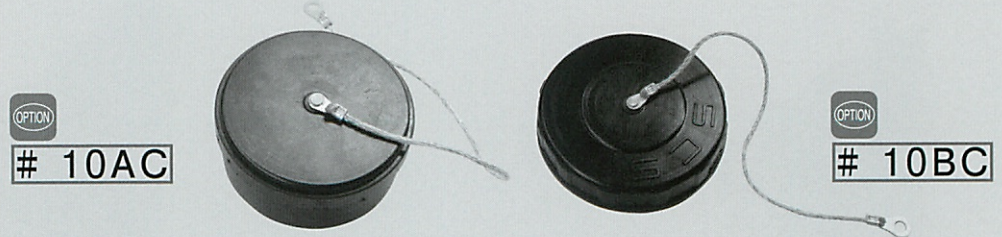

<SK-4100>
中継タイプ

<SD-4100>
パネルタイプ

<SC-4100>
露出タイプ

4101
OPTION
10AC




4102
OPTION
10BC



4106



4104

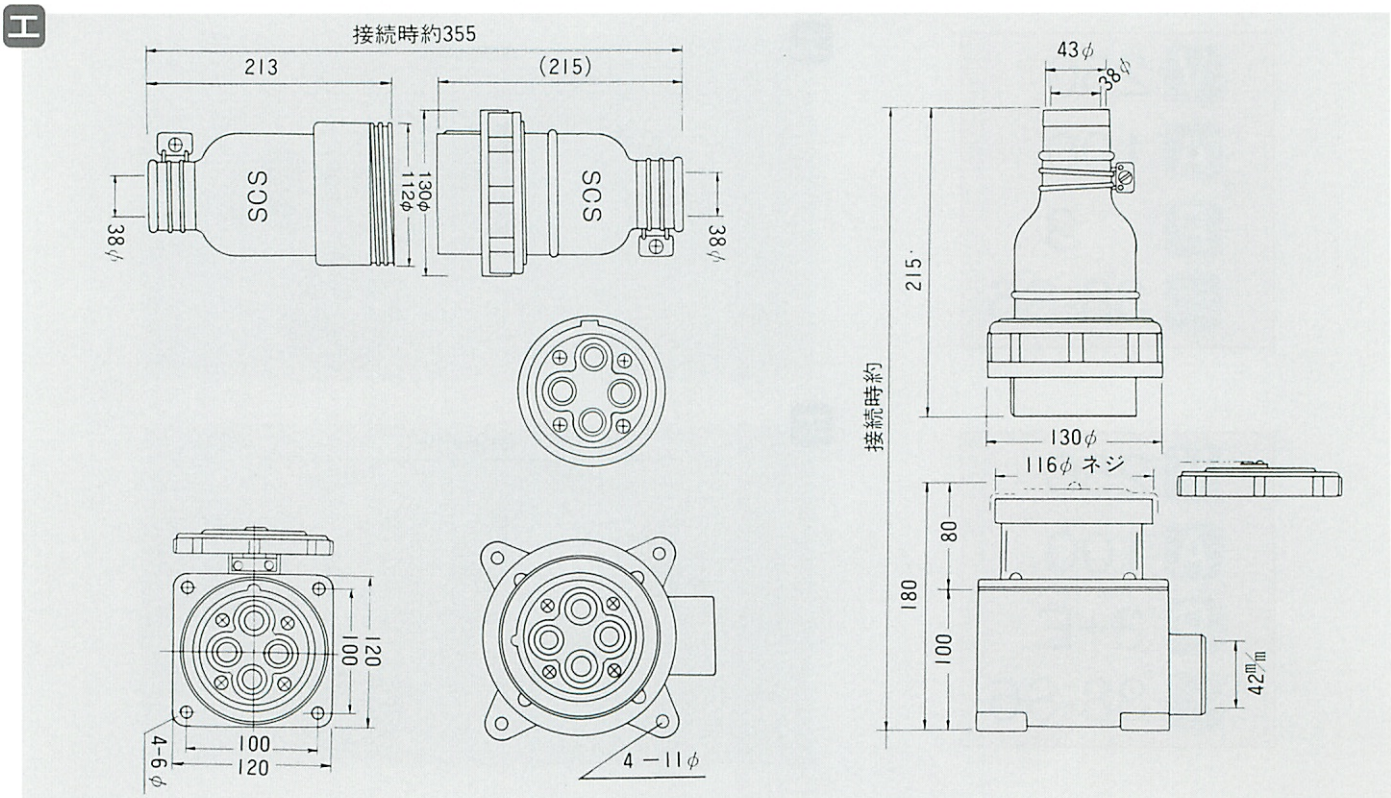


通常アンペアと電線のスケアの関係	5A → 1.25sq	10A → 2.0sq	20A → 3.5sq	30A → 5.5sq	40A → 8.0sq	60A → 14sq
	100A → 38sq	200A → 60sq	300A → 100sq	400A → 150sq	500A → 200sq	600A → 250sq


SCSの防水コネクタ・パネルコンセント

露出型防水コンセント

100A

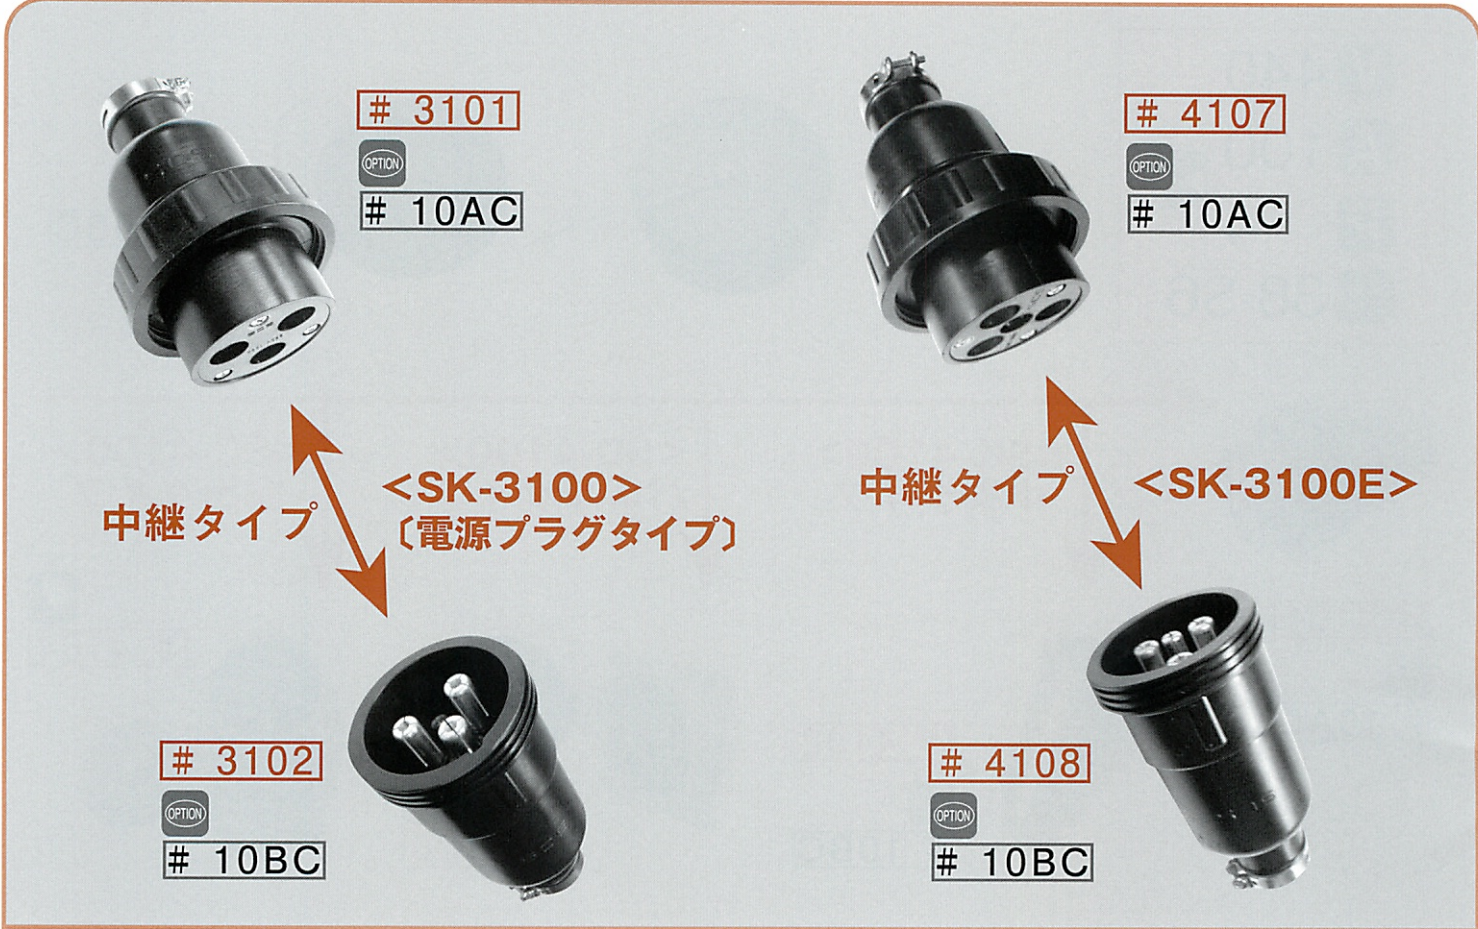

V 250
A 100
P 3
38-S6

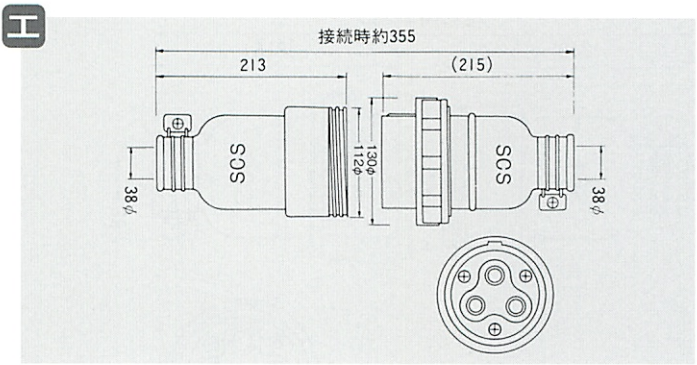

V 250
A 100
P 3+E
38-S6

